



Fall Protection: Basic Types

Explain dangers

Falls are the number-one cause of accidental deaths and critical injuries in construction. And you don't have to fall far to be injured or killed.

Identify controls

On many sites, guardrails are the most common and convenient means of fall protection. Where guardrails cannot be used, workers must use another means of fall protection to prevent a fall.

Two basic types of fall protection are travel restraint and fall arrest. Both involve wearing a full-body harness.

1. TRAVEL RESTRAINT

A travel restraint system keeps you from getting too close to an unprotected edge. The lifeline and lanyard are adjusted to let you reach the edge but not fall over it.

A full-body harness used with a travel restraint system attaches to an adequately anchored lifeline or to a lanyard that attaches to an adequately anchored lifeline.

2. FALL ARREST

If no other means of fall protection is in place, you must use a fall arrest system if you are in danger of falling:

- More than 3 metres
- Into operating machinery
- Into water or another liquid
- Into or onto a hazardous substance or object.

A fall arrest system must also be worn when workers are:

- On a rolling scaffold that is being moved
- In a scissor lift when it is moving and in all other elevated work platforms at all times
- Getting on, working from, or getting off a suspended platform or scaffold, or a bosun's chair.

A fall arrest system prevents a falling worker from hitting

the ground or any object below. It consists of a full-body harness attached to a lanyard and energy absorber, which reduces some of the force exerted on the body when a fall is arrested.

The lanyard and energy absorber is attached to an adequate anchor point or to a rope grab on an adequately anchored lifeline. REMEMBER: When used with a rope grab, the length of a lanyard in a fall arrest system must not exceed 76 cm (30 in).

Full-body harnesses are fully adjustable and available in different sizes. Some types are specially designed for women. Proper fit of the harness is important, especially when it is being used for fall arrest.

Demonstrate

Ask workers if they have taken an approved working at heights (WAH) training course and have received site-specific WAH instruction. Remind them to check that their WAH training has not expired.


Review how to put on, adjust, and wear a full-body harness.

1. Adjust the chest strap so that it is snug and located near the middle of the chest (i.e., above the sternum, just below the armpits).
2. Adjust the leg straps so that a fist can fit snugly between the strap and leg.
3. Adjust the shoulder straps so that the back D-ring rests between the shoulder blades.

Review the written procedures for rescuing a worker whose fall has been arrested and show workers where they are posted on site. These procedures must be developed by the employer before using a fall arrest system.



Materials adapted with permission from Infrastructure Health and Safety Association

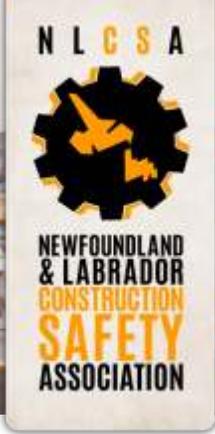


Demonstrate

Ask workers if they have taken an approved working at heights (WAH) training course and have received site-specific WAH instruction. Remind them to check that their WAH training has not expired.

Review how to put on, adjust, and wear a full-body harness.

1. Adjust the chest strap so that it is snug and located near the middle of the chest (i.e., above the sternum, just below the armpits).
2. Adjust the leg straps so that a fist can fit snugly between the strap and leg.
3. Adjust the shoulder straps so that the back D-ring rests between the shoulder blades.

Review the written procedures for rescuing a worker whose fall has been arrested and show workers where they are posted on site. These procedures must be developed by the employer before using a fall arrest system.

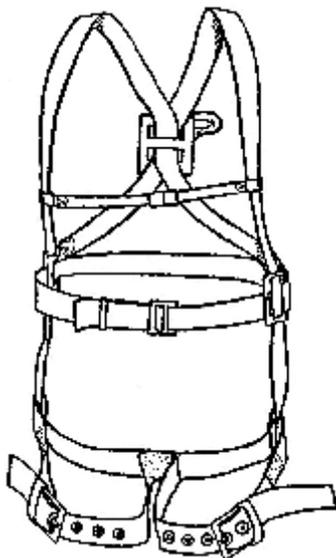

Full Body Harness



Materials adapted with permission from Infrastructure Health and Safety Association